

LIVI 3/24E/F

NEW

DEA
move as you like

Electromechanical automation for sliding gates
(cod. 614134)



Sliding gates



Residential use



Safe and user friendly technologies

LIVI 3/24/F is the new DEA motor in **24V** for sliding residential gates up to **350 Kg**.


LIVI 3/24/F is equipped with a **NET324N** control unit with receiver and limit switch.

Features


- **Irreversible** with **electromechanical limit switch**
- **Motor** release with **personalized key** in case of power failure
- Speed and slow down in opening and closing adjustment
- Max speed **14m/min**
- Protection level **IPX4**



3 years warranty on motors and control units

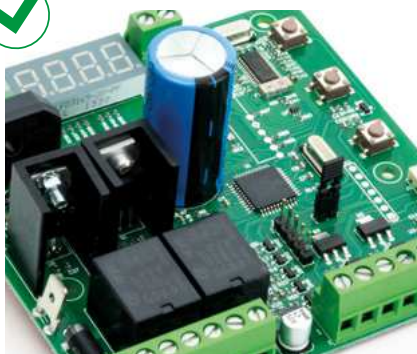

With NET324N control board

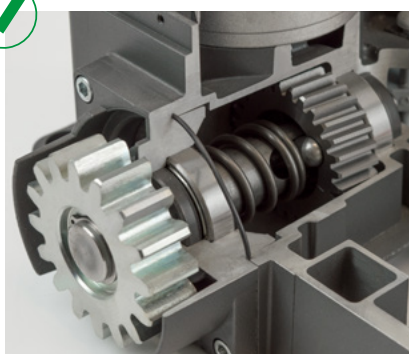

Internal mechanics in steel with ball bearings



Emergency unlocking device with personalized key

Motor technical info


Motor power supply (V)	24 V ===
Maximum power absorption (W)	55
Max thrust (N)	140
Duty cycle (cycles/hours)*	8
N. max cycles in 24h	20
Built-in capacitor (µF)	-
Operating temperature (°C)	-20 ÷ 50
Motor thermal protection (°C)	-
Speed (m/min)	14
Weight with packing (Kg)	11,5
Protection level	IPX4

*For L=5m leaf lenght

Control board art. NET324N technical info

Power supply voltage	230 V ~ ±10% (50/60 Hz)
Nominal transformer power	80VA (230/22V)
Fuse F1(A)	T1A 250V (timed)
Auxiliary power output	24 V max 200mA
Output 1. FLASH	24 V max 5 W
Output 2. WARNING	24 V max 5 W
Radio receiver frequency	433,92 MHz
Type of code for remotes (selectable)	HCS fix-code HCS rolling-code Dip switch
Max. N° of managed remotes	100

Example of typical installation

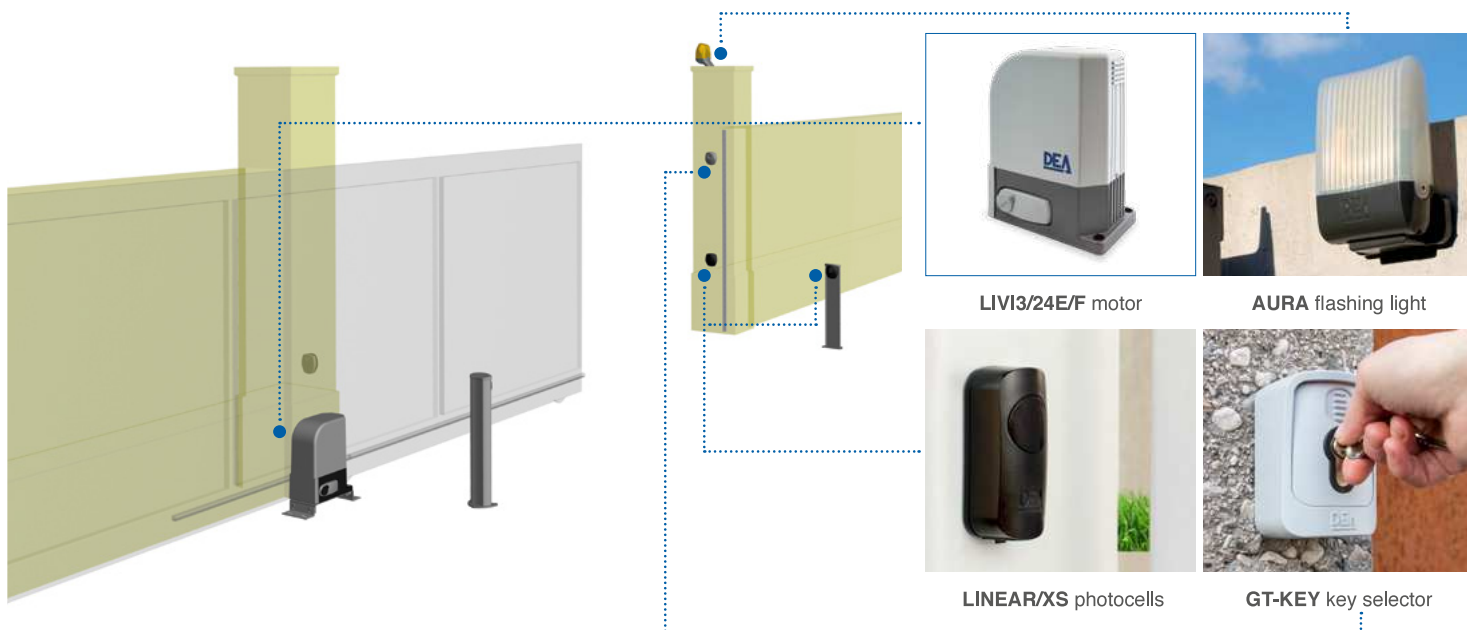

PRACTICALITY and SAFETY:

LIVI range is perfectly compatible with BLINDOS, the gate external unlocking device in case of power failure

KIT LIVI 3/24E/F

NEW

Kit for sliding gates automation

(cod. 614681)



1x LIVI 3/24E/F



1x NET324N



1x AURA



1x LINEAR/XS



2x GT4